
homeotto

HomeOtto Smart Thermostat
Model T202

Wall Plate Wiring

Otto thermostats work with most centralized residential heating and cooling systems.
Please contact us directly to troubleshoot issues.

homeotto.ca/help
OR
Text 780-851-8886

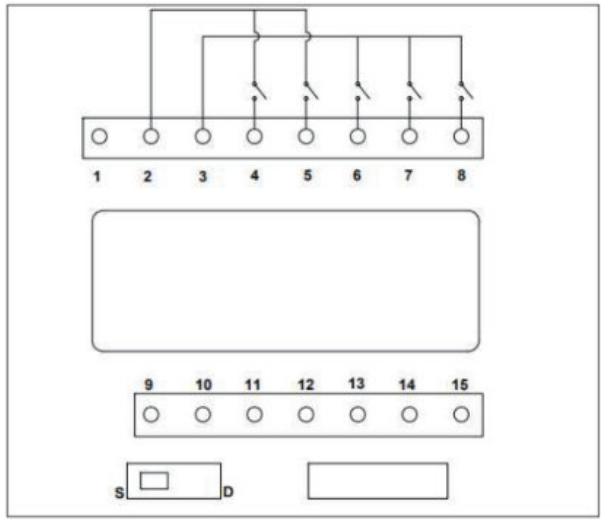

Terminal	Conventional	Heat Pump	
1	C	C	24VAC Common Power
2	Rh	Rh	24VAC Heat Power
3	Rc	Rc	24VAC Cool Power
4	W1	O/B	Heating or Changeover
5	W2	AUX	2nd Stage or Auxiliary Heating
6	G	G	Fan
7	Y1	Y1	A/C Compressor stage 1
8	Y2	Y2	A/C Compressor stage 2

WARNING!
This thermostat is designed for 24VAC power supplies with a 2A maximum current.
Do not connect this device to line (high) voltage or millivolt systems.