

Conventional heating & Cooling **(2 stages)**

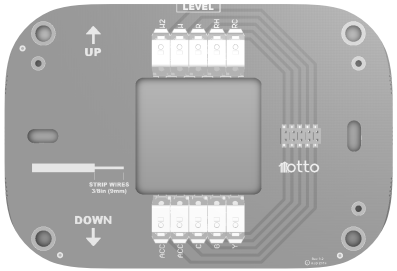

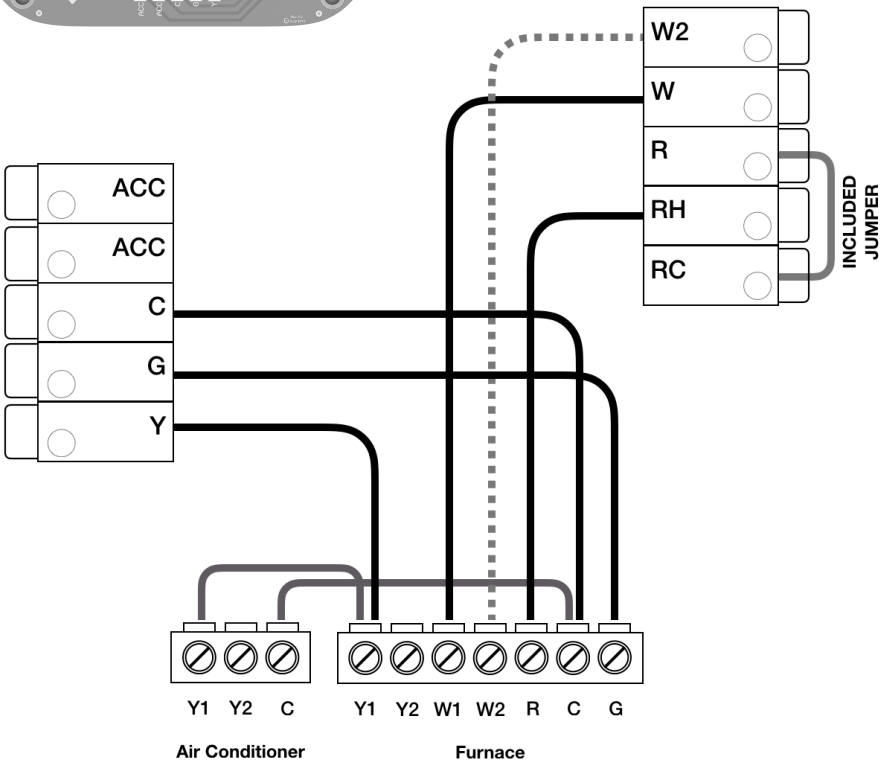

Warning! Thermostat is designed for 24VAC with a 2A maximum current. Do not connect it to line (high) voltage or millivolt systems.

Compatible Systems


Otto thermostat works with most centralized residential heating and cooling systems.

Heating	up to 2 stages
Cooling	up to 1 stages
Accessories	Dehumidifier, Humidified, Second Stage Cooling or Ventilation device.

Terminal Descriptions

G	Fan
RC	Cool transformer
RH	Heat transformer
Y	Used for 1 stage conventional A/C
W	Used for 1 - 2 stages of conventional heat
C	24 VAC common
ACC +/-	Accessory (+/-): Used for dehumidifiers, humidifiers, second stage cool, ventilators, HRVs or ERVs

Basic Operations

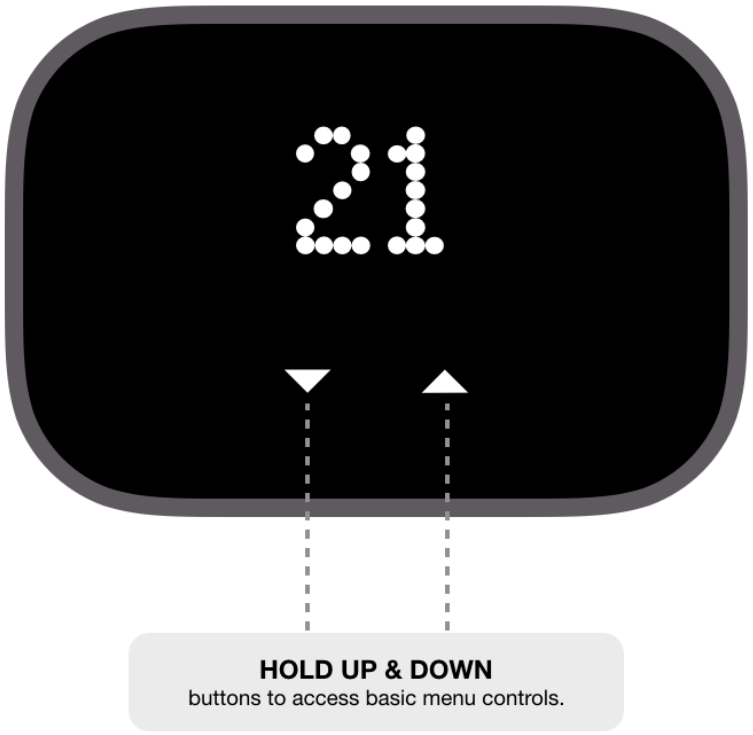

On Screen Menu

Cooling Mode	ON/OFF	Default - OFF
Heating Mode	ON/OFF	**Default - ON**
Fan	ON/OFF	Default - OFF/AUTO



App Control

Adjust temperature
Change mode (Heat & Cool)
Fan Control (Auto/On/Off
Scheduling (Date/Time)
Hold (2, 4, 6 hours)
Advanced Settings (T-value, Display brightness, Wall LED ON/ OFF,